OPERATIONS

Internal Use Only

Early Equipment Management (EEM)

Involve operations and maintenance teams in equipment specification, design, and commissioning to achieve fast

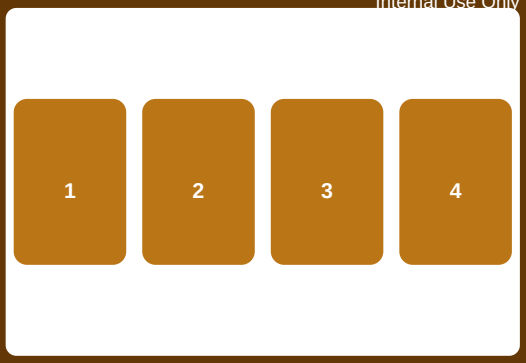

WHEN TO USE

When procuring new equipment or designing new production lines — before the specification is issued to vendors.

HOW TO APPLY — STEPS

1. Involve production and maintenance engineers at the specification stage — before purchase
2. Capture and integrate lessons learned from existing similar equipment
3. Review equipment designs formally for maintainability and operability
4. Plan the vertical start-up with detailed commissioning milestones
5. Target achieving designed performance level within the first month of operation

PRACTITIONER TIP

! The team that operates and maintains the equipment must help specify it. Design engineers working alone consistently get it wrong.

KEY OUTPUTS

- Equipment specification incorporating operational requirements
- Maintenance Prevention (MP) information database
- Vertical start-up plan
- Commissioning performance report

HOW TO MEASURE SUCCESS

Days to achieve target OEE after commissioning; early-life failures vs benchmark; ramp-up cost vs plan

TOOL CATEGORY
Operations